



MURANO PURO

Lightweight glass roof





SYSTEM

Technical features


TYPES AND STYLES <i>(see also drawings below)</i>	Roof FLUSH (B) Posts outside (B1) or recessed (B2)
	<ul style="list-style-type: none"> externally flush model (B1): always possible with 3 posts, not in all widths with 2 posts (depends on roof size and snow load zone) for large widths the stronger purlin/rain gutter from the MURANO VETRO model is used if necessary (depends on roof size and snow load zone) recessed model (B2): supports always recessed by up to 1/5
Width 1 unit	max. 540 cm
Depth	max. 350 cm

Centimetre-accurate manufacture in all intermediate widths!


Tilt angle	3° - 10°, stepless (a tilt angle of at least 5° is recommended to improve water drainage)
Rafter spacings	max. 120 cm (depending on roof size and snow load zone)
Post height	max. 600 cm (standard: 300 cm)
Construction height	Dependent on depth selected and roof pitch between 3° and 10°
Scope of supply, attachment	<ul style="list-style-type: none"> supplied incl. wall bracket profile <u>without</u> mounting screws and dowels posts <u>without</u> mounting screws and dowels with integral downpipe to bottom edge of post, without connections
Frame colours	<ul style="list-style-type: none"> 16 RAL colours and 5 textured finishes to choose from (see LEWENS price list for colour chart) special RAL (extra charge) special colours and effect finishes on request
Options <i>(additional equipment)</i>	<ol style="list-style-type: none"> Side walls and triangular infill section Radiant heater LED lighting strips

Please refer to technical data in the current Lewens price list for possible dimensions and restrictions and for the complete list of electronic accessories.

Styles

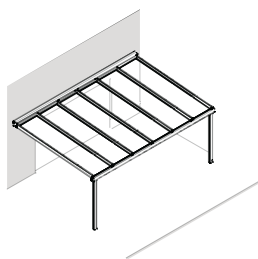

B1 flush, outside
B1v as B1, with Murano Vetro purlin

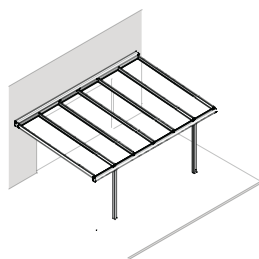

B2 flush, recessed
B2v as B2, with Murano Vetro purlin

Guarantees

CE Quality and engineering conform to
EN 13561 CE standard

made in germany Manufactured and assembled in Germany



LIFE Guarantee
LEWENS awnings stand for:



L.UST FOR LIFE

I.NTELLIGENCE

F.REEDOM

E.ASY LIVING

Fitting

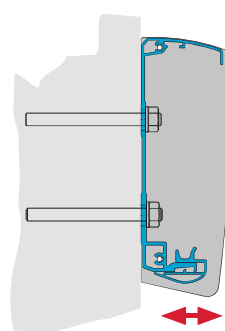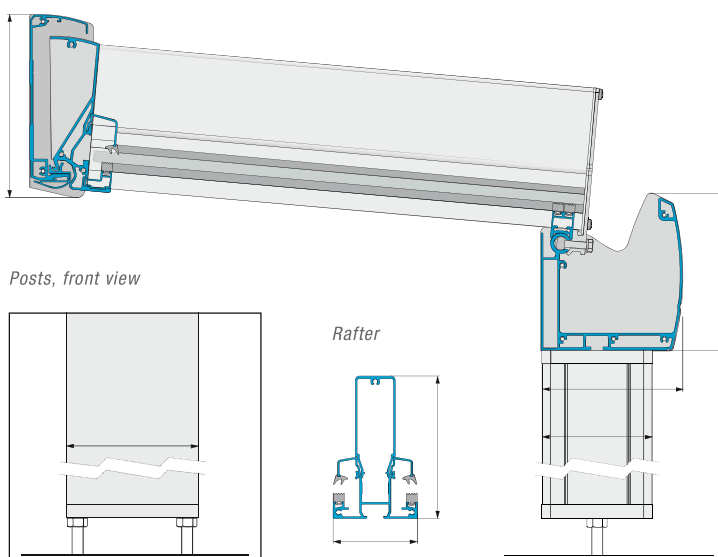

Wall attachment

The profile on which the case is mounted permits a tolerance, enabling any unevenness in the wall surface of up to 1 cm to be equalised without difficulty.

